

ah!38 Curved

ah!38 Curved

introduction

ah!38 excels as an exterior opening system comprising a balanced combination of thermal and acoustic behavior, suited to all climates. It is a system that allows double glazed surface areas of up to 19m², or triple glazed of up to 6m². Both options use 23mm vertical profiles. Curved sliding elements offer smooth running performance and can be motorized upon request. **panoramah!®curved** system allows a radius of 1,5m and the curved glass is always tempered.

Le **ah!38** excelle en tant que système d'ouverture extérieure, combinant de manière équilibrée comportement thermique et acoustique, adapté à tous les climats. **ah!38** permet des fenêtres minimalistes avec une surface en double vitrage allant jusqu'à 19m² ou en triple vitrage allant jusqu'à 6m², avec des profils verticaux de 23mm.

Les éléments coulissants courbes offrent des performances optimales et peuvent être motorisés sur demande. Le système **courbe panoramah!®** permet un rayon de 1,5m et le verre bombé est toujours trempé.

sliding system

	fixed	sliding
		
monorail	•	
birail		•
multirail		•

main dimensions up to		performance up to	
vertical profile profil vertical	20mm	light transmission transmission lumineuse	up to 98%
max. leaf height hauteur max. du vitrage	3000mm	thermal coefficient coefficient thermique	Uw = 1.165W/m ² .K (Ug = 0.7W/m ² .K)
max. leaf width longueur max. du vitrage	3000mm	security sécurité	RC2 / WK2
max. weight poids max.	up to 2.000kg / glass panel		
max. glazed area surface max. du vitrage	double glazing double vitrage	water tightness résistance à l'eau	Class E900
	up to 9m ²		
min. radius rayon min.	1500mm	air tightness résistance à l'air	Class 4
glass thickness épaisseur du vitrage	38mm	wind tightness résistance au vent	Class C5



Barangaroo, Sydney, Australia
Collins and Turner
© Rory Gardiner

construction

finishes finitions

All **panoramah!**® System series guarantee that the following finishes are carried out by duly certified entities, according to QUALICOAT and QUALANOD directives: Lacquered RAL, Lacquered PVDS, Anodized, Satin, Polished and Repellent. Tous les traitements de surface **panoramah!**® sont certifiés selon les directives QUALICOAT et QUALANOD: Laquage RAL ou PVDS, anodisation naturelle ou couleur, satinée, polie ou brossée.

add-ons add-ons

Heated glass / intrusion detectors / balustrade
Vitrage chauffé / détecteurs d'intrusion / garde-corps

motorisation automatisation


Our motorisation system can be adapted to all sliding or opening systems allowing a full integration with minimum interference in architectural design with a simplified and very quiet opening. Notre système de motorisation peut être adapté à tous les systèmes coulissants ou ouvrants, permettant une intégration complète avec un minimum d'interférences dans la conception architecturale avec une ouverture simplifiée et très silencieuse.

ah!38

curved common sections | courbe sections communes


1:3

scale / échelle

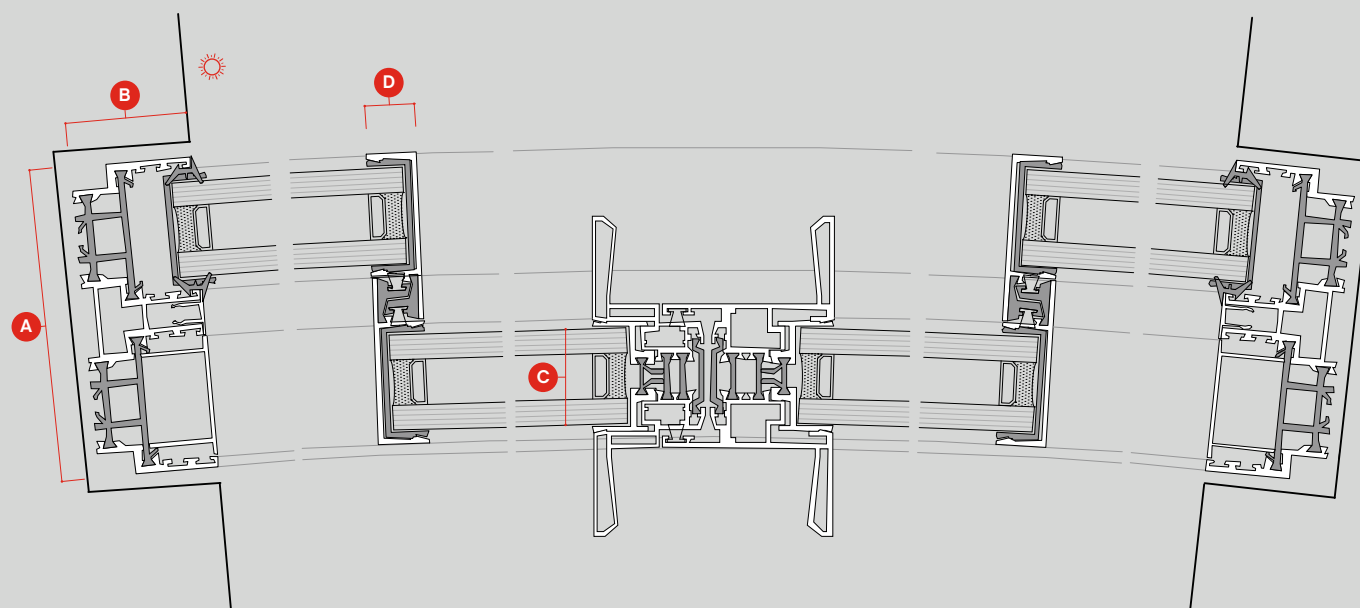

dimensions

A	124mm	D	20mm
B	48mm	E	48mm
C	38mm	F	10mm

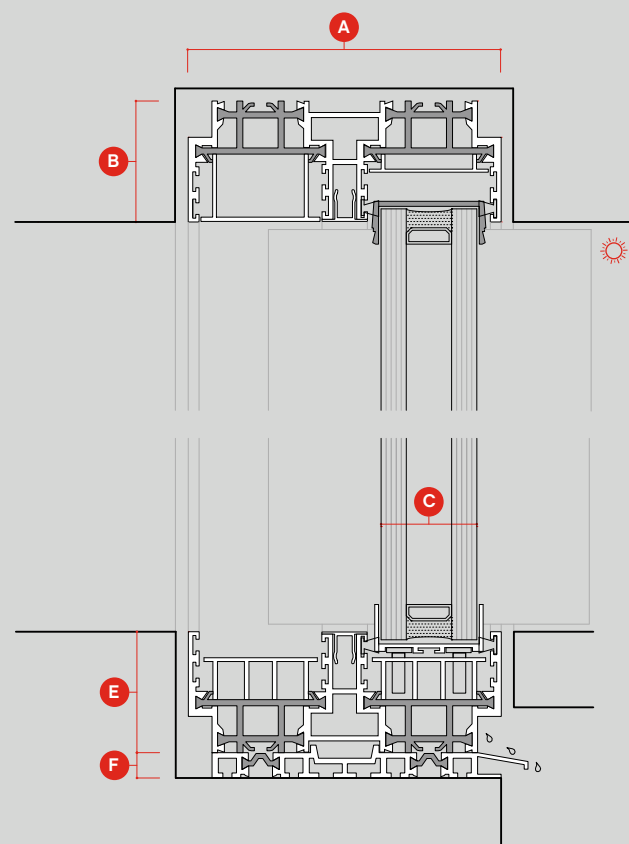



Cannon Lane | London, UK
Claudio Silverstrin Architects
© James Morris

Bending and Tempering
Minimum radius 350mm
Max size 6000 x 3200 mm



Quinta do Lago | Loulé, Portugal
 Vasco Vieira Arquitectos
 © Fernando Guerra | FG+SG

Cold Bending





Villa AT | Søgne, Kristiansand, Norway
 Saunders Architecture (Todd Saunders)
 © Bent René Synnevåg

Tempered Bending
 Triple Glazing with Low-e coating on the concave face #4
 Triple Glazing with Low-e coating on the concave face #5

we build ah!



unlimited perspective sa
ch philibert-de-sauvage 37
1219 chatelaine
switzerland

p. +41 21 804 1700
f. +41 21 804 1709

info@panoramah.com
www.panoramah.com

facebook
www.facebook.com/panoramah.ch/

instagram
www.instagram.com/__panoramah__/